

# Video Quality Monitors

## Consul System Monitor • VNM-CON2 Datasheet



Consul™ is typically located at a Network Operation Center (NOC) and provides an ideal solution for correlating and managing data from Medius units located throughout the network.

### Key features

- Program alert dashboard provides single consolidated view of all programs across all Medius units
- Supports multiple Medius units
- Automatic report generation and e-mail in PDF format per user-defined schedule

### Applications

- Generate alert analysis reports with roll-up data collected from multiple Medius units


### QoE monitoring across networks

Consul™ aggregates reports and trending data from multiple Medius units and offers video service providers an effective way of utilizing monitoring data in large-scale monitoring deployments.

Consul can be used by service providers to gain a quick understanding of the quality of experience they are providing on a local, regional, or national level. Key features of Consul include a program alert dashboard that gives a single consolidated view of all programs monitored across all Medius units. The dashboard quickly alerts service providers to issues occurring across the network. In addition, Consul provides an understanding of the video quality degradation from location to location and identifying the top offending programs at each location.

Capturing detailed QoE (Quality of Experience) information is a function of the Consul advanced reporting package. The reporting capabilities allow each user (i.e., a national NOC/operation center) to generate customized reports that provide as much or as focused detail as required, from monthly high-level reports for executive staff to immediate notices for technicians as incidents occur.

Users can create a schedule template so that reports can be generated automatically and e-mailed to designated recipients. Examples of the reports include alert counts by location, trending reports, and distributions by alert type.

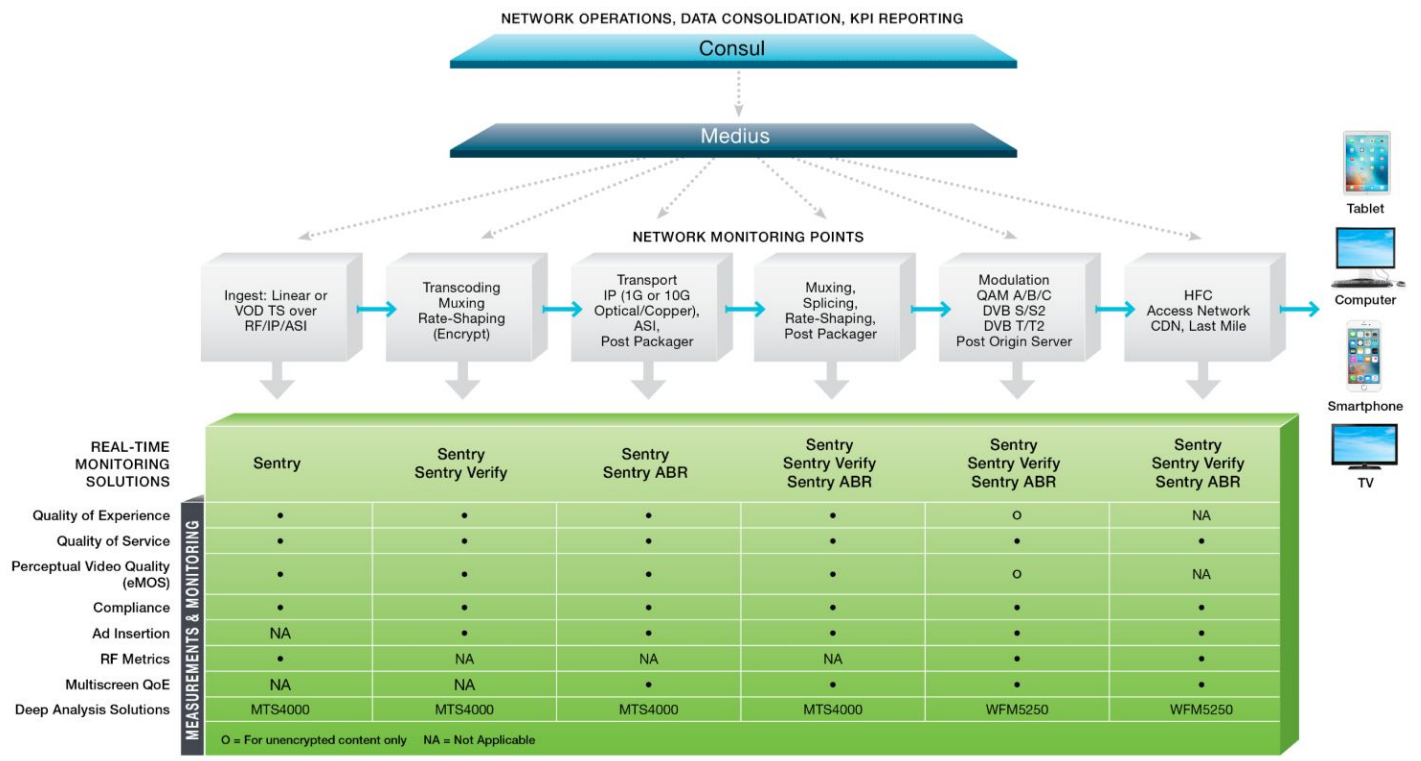

Consul is typically located at a regional or national Network Operation Center (NOC) and provides an ideal solution for correlating and managing data from Medius units located throughout the network.

## Specifications

### Interface characteristics

<b>Browser support</b>	Firefox, Safari, and Internet Explorer
------------------------	--

<b>MPEG/IP input port</b>	1000BASE-T Ethernet interface
---------------------------	-------------------------------

<b>Management port</b>	1000BASE-T Ethernet interface
------------------------	-------------------------------

### Physical characteristics

#### Dimensions

<b>Height</b>	44 mm (1.73 in)
---------------	-----------------

<b>Width</b>	437 mm (17.2 in)
--------------	------------------

<b>Depth</b>	600 mm (29.5 in)
--------------	------------------

<b>Weight (net)</b>	12.4 kg (27 lb.)
---------------------	------------------

<b>Power requirements</b>	100-240 VAC, 50-60 Hz
---------------------------	-----------------------

### Environmental characteristics

#### Temperature

<b>Operating</b>	+10°C to +35°C, 30°C per hour maximum gradient
------------------	--

Temperature of the intake air at the front and sides of the instrument

<b>Non-operating</b>	-20°C to +60°C, 30°C per hour maximum gradient
----------------------	--

<b>Power</b>	4.0-1.7 A maximum, 100 - 240 V, 50/60 Hz
--------------	--

The maximum power consumption for any board combination measured is 175 W at 120 V by safety test

## Ordering information

### Models

VNM-CON	Consul System Monitor
---------	-----------------------

### Instrument options

#### Power plug options

Opt. A0	North America power plug (115 V, 60 Hz)
Opt. A1	Universal Euro power plug (220 V, 50 Hz)
Opt. A2	United Kingdom power plug (240 V, 50 Hz)
Opt. A3	Australia power plug (240 V, 50 Hz)
Opt. A4	North America power plug (240 V, 50 Hz)
Opt. A5	Switzerland power plug (220 V, 50 Hz)
Opt. A6	Japan power plug (100 V, 50/60 Hz)
Opt. A10	China power plug (50 Hz)
Opt. A11	India power plug (50 Hz)
Opt. A12	Brazil power plug (60 Hz)
Opt. A99	No power cord



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



**ASEAN / Australasia** (65) 6356 3900  
**Belgium** 00800 2255 4835\*  
**Central East Europe and the Baltics** +41 52 675 3777  
**Finland** +41 52 675 3777  
**Hong Kong** 400 820 5835  
**Japan** 81 (3) 6714 3086  
**Middle East, Asia, and North Africa** +41 52 675 3777  
**People's Republic of China** 400 820 5835  
**Republic of Korea** +822 6917 5084, 822 6917 5080  
**Spain** 00800 2255 4835\*  
**Taiwan** 886 (2) 2656 6688

**Austria** 00800 2255 4835\*  
**Brazil** +55 (11) 3759 7627  
**Central Europe & Greece** +41 52 675 3777  
**France** 00800 2255 4835\*  
**India** 000 800 650 1835  
**Luxembourg** +41 52 675 3777  
**The Netherlands** 00800 2255 4835\*  
**Poland** +41 52 675 3777  
**Russia & CIS** +7 (495) 6647564  
**Sweden** 00800 2255 4835\*  
**United Kingdom & Ireland** 00800 2255 4835\*

**Balkans, Israel, South Africa and other ISE Countries** +41 52 675 3777  
**Canada** 1 800 833 9200  
**Denmark** +45 80 88 1401  
**Germany** 00800 2255 4835\*  
**Italy** 00800 2255 4835\*  
**Mexico, Central/South America & Caribbean** 52 (55) 56 04 50 90  
**Norway** 800 16098  
**Portugal** 80 08 12370  
**South Africa** +41 52 675 3777  
**Switzerland** 00800 2255 4835\*  
**USA** 1 800 833 9200

\* European toll-free number. If not accessible, call: +41 52 675 3777

**For Further Information.** Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit [www.tek.com](http://www.tek.com).

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.



29 Jun 2017 2CW-61219-0

[www.tek.com](http://www.tek.com)

**Tektronix**<sup>®</sup>

